

DR111 LED REFLECTOR ADV - GU10



- * Base: GU10
- * Working at mains, non transformer needed.
- * Using High Power SHARP LEDs.
- * Fuse for mains protection.
- * Working position: universal.
- * Warm white colour temperature.
- * Reflector effect: the light source is covered exactly like in traditional halogen DR111 lamps, therefore the same anti-glare effect is obtained with an even better diffused, shadow free, light distribution.
- * Unique design of the heat sink: improves the efficiency of heat dissipation.
- * DR111 REFLECTOR ADV 15W is available upon request. Available also with 12° and 35° openings.

Item Characteristics

Code	08057
Lamp Voltage	220-240 V
Nominal Power	15 W
Base	GU10
Nominal Flux	810 LUMEN
Light Tonality	Warm White
Colour temperature	3000 K
Opening beam	35°
Diameter	111 mm
Length	103 mm
Weight	396 g


Performance

Axis cd	2273
Photometry	F80
Irc/Ra	80
Lifetime	30000 h
Energy Class	A
kWh/1000h	15
Equivalence with incandescent lamp	87 W

Tech Info

Dimmable	NO
Open fittings	YES
Number of ON-OFF cycles	100000
Power Factor	0,94
Warm-up time up to 60 % of the full light output	Instant Full Light
Lamp start time	<0,2s
Mercury (mg)	0
LLMMF - Lamp lumen maintenance factor	70
T (°C) Working environment Temp.	-25°C / +35°C
Fulfilled Directives and norms	2011/65/UE * RoHS 2012/19/UE * RAEE 2014/30/UE * Compatibilità Elettromagnetica 2014/35/UE * Bassa Tensione EN 61547 * anno 2010 EN 55015 * anno 2014 EN 61000-3-2 * anno 2007 (+A1/+A2:2011) EN 61000-3-3 * anno 2014 EN 62471 * anno 2010 IEC/TR 62471-2 EN 62031 * anno 2009 (+A1:2013) EN 62560 * anno 2013 EN 60968 * anno 2013 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling 2009/125/CE * Progettazione Eco Compatibile 1194/2012 * Progettazione Eco Compatibile

Spectrocolorimetry and Photometry

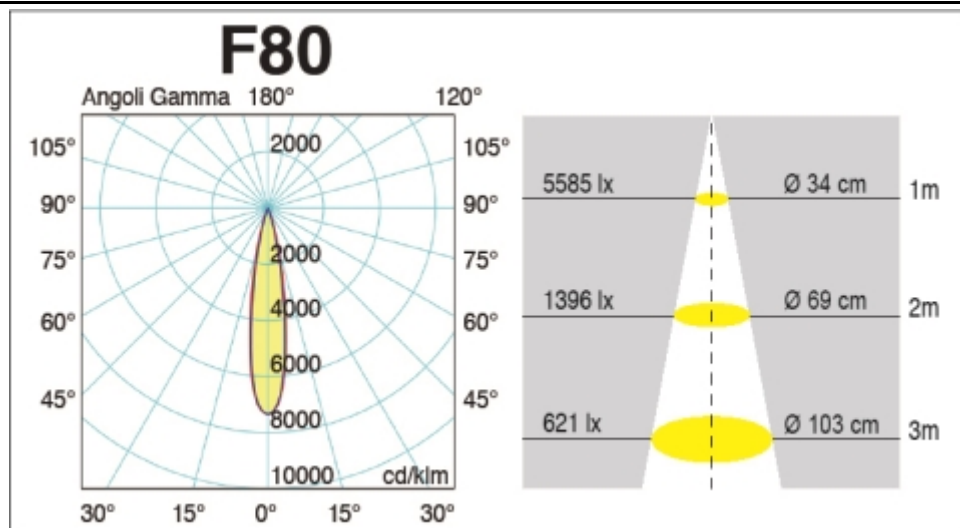

Shipping info

Single pack dimensions L x H x D (mm)	133 x 115 x 133
Item barcode	8011905834234
Pack	1 pz
Master barcode	8011905779511
Technical Info	